

A.R.I. D-040

Aquestia
Directing the Flow



Waterworks

Combination Air Valve


Description

A.R.I. D-040 Series, is a reduced bore Combination Air Valve. Installed on liquid transmission systems, the Air Valve is designed to improve hydraulic operation by protecting the pipeline, increasing pipeline efficiency and reducing energy requirements.

Installation

- Pump stations: downstream of the pump and the check valve
- Downstream and upstream of shut-off valves
- Downstream of deep-well pumps
- On long constant-sloped pipeline segments
- At peaks along the pipeline and at peaks relative to hydraulic gradient
- At end lines
- Before water meters
- On strainers and filters

Operation



Air Discharge



Air Intake




Automatic
Air Release



One Way Out



One Way In




Non Slam

Valve Selection Options

Models	A.R.I. D-040 A.R.I. D-040 C - Protecting Shell A.R.I. D-040 L - Specifically designed to operate with liquids containing small suspended solids
Valve connection	Threaded male BSPT/NPT Flanged ends to meet various requested standard
Standard materials	Reinforced Nylon, Polypropylene, Stainless Steel 316, Cast Ductile Iron Shell
Optional add-on components	One-way Out attachment, allows for air discharge only, prevents air intake One-way in attachment, allows air intake only, not allowing air discharge Non-slam, discharge-throttling attachment, allows full air intake, throttles air discharge (2" only)
Pressure rating	PN6 A.R.I. D-040 L PN10 A.R.I. D-040 A.R.I. D-040 L PN16 A.R.I. D-040 A.R.I. D-040 L PN16 A.R.I. D-040-C





Dimensions and Weight

Size	Dimensions (mm)		Connections	Weight (kg)	Orifice Area (mm ²)		
	max. A	B			C	A / V	Auto.
Nylon Models							
D-040							
1/2" (15mm), 3/4" (20mm), 1" (25mm) TRH	100	143	3/8" BSP Female	0.33	100	7.8	
2" (50mm) TRH	183	215	1½" BSP Female	1.1	804	12	
2" (50mm) FL	211	222	1½" BSP Female	1.6	804	12	
D-040 L							
1/2" (15mm), 3/4" (20mm), 1" (25mm) TRH	100	227	3/8" BSP Female	0.6	100	7.8	
2" (50mm) TRH	183	346	1½" BSP Female	2	804	12	
2" (50mm) FL	211	354	1½" BSP Female	2.5	804	12	
Metal Models							
D-040 C							
1/2" (15mm), 3/4" (20mm), 1" (25mm) TRH	125	150	3/8" BSP Female	1.2	82	5	
2" (50mm) TRH	203	230	1½" BSP Female	5.4	804	12	
2" (50mm) FL	214	230	1½" BSP Female	7.3	804	12	

NOTE


Dimension A in the picture and in the table shows the maximum product width. All product weights are approximate, due to the differences in flange standards, materials and variable accessories.

FL - Flanged THR - Threaded


Flow Charts

D-040

Air & Vacuum Flow Rate

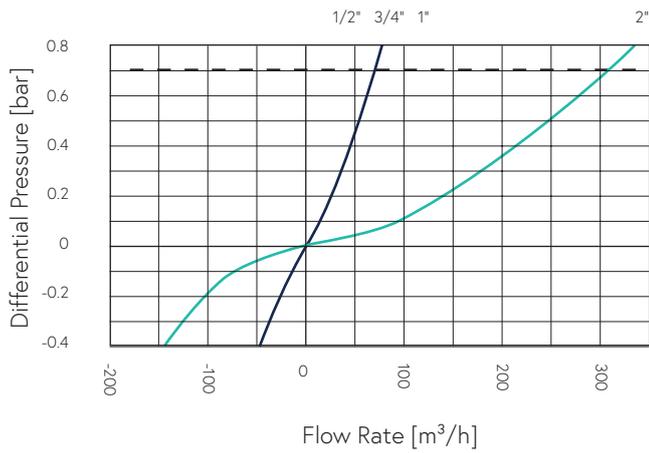


Automatic Air Release Flow Rate

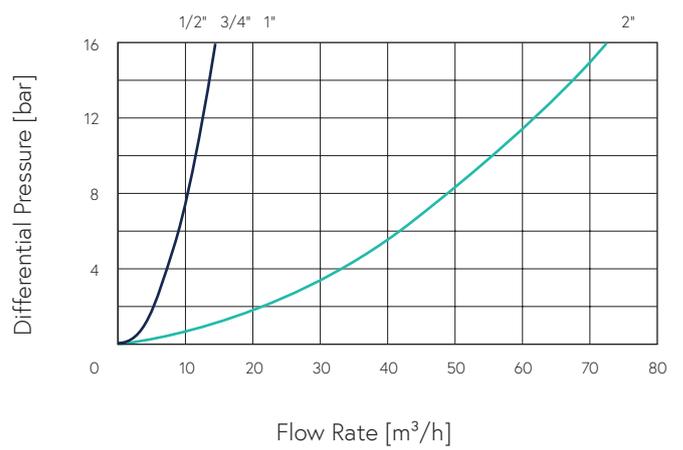


--- Max. recommended design air discharge

D-040 NS

Air & Vacuum Flow Rate

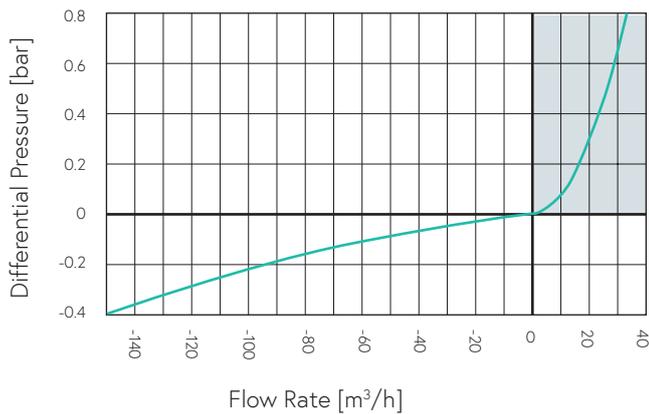

Air Discharge Flow Rate

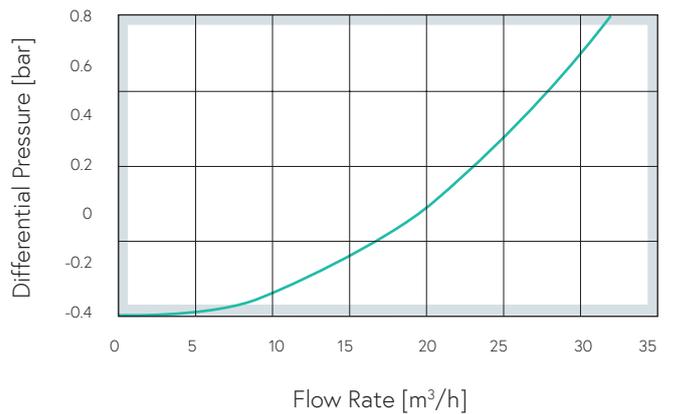

Parts List and Specifications

No.	Part	Material
1	Cover Assembly	
1a	Discharge Outlet	Polypropylene
1b	Body	Reinforced Nylon / Polypropylene
2	Air Release / Air & Vacuum Assembly	
2a	Clamping Stem	Reinforced Nylon / Polypropylene
2b	Float	Foamed Polypropylene
2c	Rolling Seal	EPDM / VITON
3	Base Assembly	
3a	O-Ring	NBR / VITON
3b	Base	Reinforced Nylon / Polypropylene

NOTE
Polypropylene for PN10 models only



Parts List and Specifications

No.	Part	Material
1	Cover Assembly	
1a	Discharge Outlet	Polypropylene
1b	One-Way or NS Check Valve (Optional)	Reinforced Nylon
1c	Body	Reinforced Nylon / Polypropylene
2	Air Release / Air & Vacuum Assembly	
2a	Clamping Stem	Reinforced Nylon / Polypropylene
2b	Float	Foamed Polypropylene
2c	Seal Assembly	
	Screws	Stainless Steel
	Plug Cover	Reinforced Nylon / Polypropylene
	Rolling Seal	EPDM / VITON
	Plug	Reinforced Nylon / Polypropylene
2d	O-Ring	NBR / VITON
3	Base Assembly	
3a	O-Ring	NBR / VITON
3b	Base	Reinforced Nylon / Polypropylene
4	Optional Flange Assembly	
4a	O-Ring	NBR
4b	Flange	Reinforced Nylon



NOTE
Polypropylene for PN10 models only

Parts List and Specifications


No.	Part	Material
1	Cover Assembly	
1a	Discharge Outlet	Polypropylene
1b	Body	Reinforced Nylon / Polypropylene
2	Air Release / Air & Vacuum Assembly	
2a	Clamping Stem	Reinforced Nylon / Polypropylene
2b	Float	Foamed Polypropylene
2c	Rolling Seal	EPDM / VITON
3	Extension Assembly	
3a	Extension	Reinforced Nylon / Polypropylene
3b	O-Ring	NBR / VITON
4	Base Assembly	
4a	O-Ring	NBR / VITON
4b	Base	Reinforced Nylon / Polypropylene

NOTE
Polypropylene for PN10 models only



Parts List and Specifications


No.	Part	Material
1	Cover Assembly	
1a	Discharge Outlet	Polypropylene
1b	One-Way or NS Check Valve (Optional)	Reinforced Nylon
1c	Body	Reinforced Nylon / Polypropylene
2	Air Release / Air & Vacuum Assembly	
2a	Clamping Stem	Reinforced Nylon / Polypropylene
2b	Float	Foamed Polypropylene
2c	Seal Assembly	
	Screws	Stainless Steel
	Plug Cover	Reinforced Nylon / Polypropylene
	Rolling Seal	EPDM / VITON
	Plug	Reinforced Nylon / Polypropylene
3	Extension Assembly	
3a	Extension	Reinforced Nylon / Polypropylene
3b	O-Ring	NBR / VITON
4	Base Assembly	
4a	O-Ring	NBR / VITON
4b	Base	Reinforced Nylon / Polypropylene
5	Optional Flange Assembly	
5a	O-Ring	NBR
5b	Flange	Reinforced Nylon

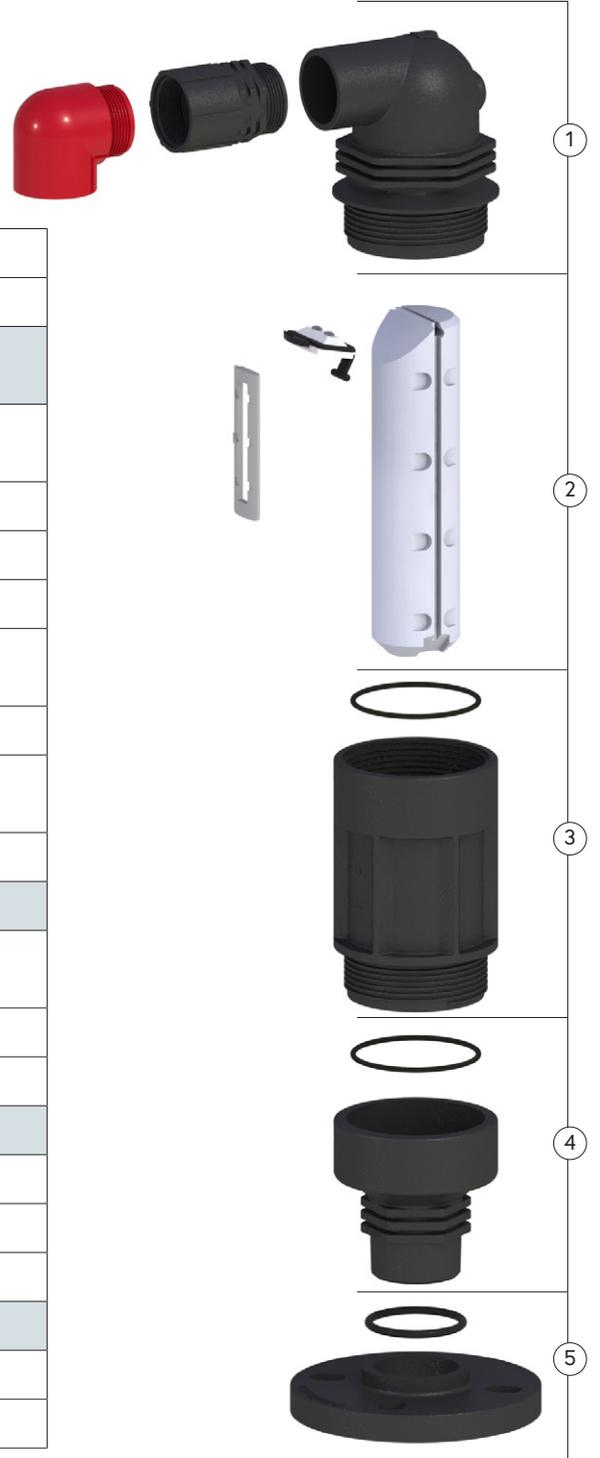

NOTE
Polypropylene for PN10 models only

Parts List and Specifications

No.	Part	Material
1	Cover Assembly	
1a	Discharge Outlet	Polypropylene
1b	O-Ring	NBR
1c	Pin	BRASS
1d	O-Ring	NBR
1e	Shell	Ductile Iron
1f	O-Ring	NBR
1g	Body	Reinforced Nylon
2	Air Release / Air & Vacuum Assembly	
2a	Clamping Stem	Reinforced Nylon
2b	Rolling Seal	EPDM
2c	Float	Foamed Polypropylene
3	Base	
3a	O-Ring	NBR
3b	Base	Brass / Stainlee Steel 316

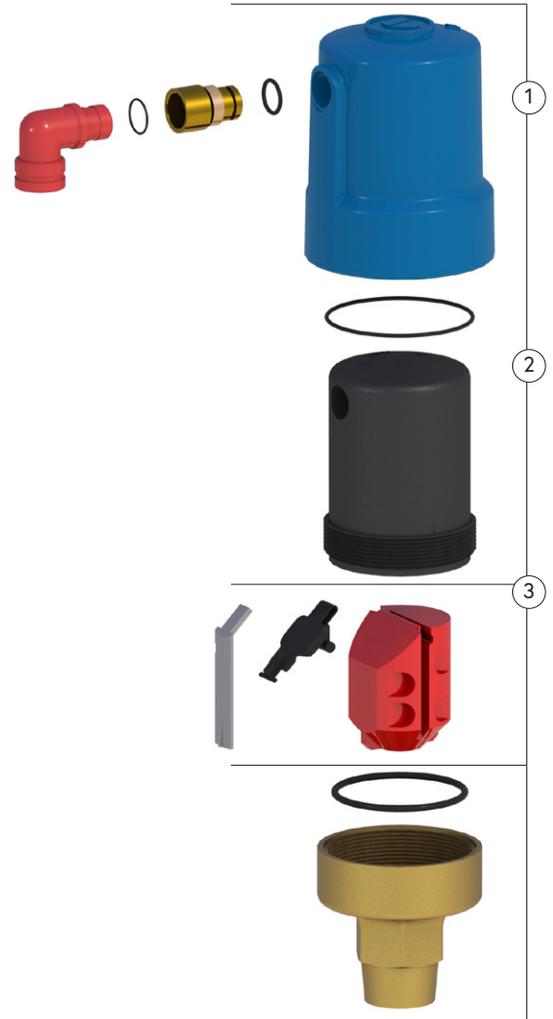

Parts List and Specifications

No.	Part	Material
1	Cover Assembly	
1a	Discharge Outlet	Polypropylene
1b	One Way / NS (Optional)	Reinforced Nylon
1c	Shell	Ductile Iron
1d	Body	Reinforced Nylon
2	Air Release / Air & Vacuum Assembly	
2a	Clamping Stem	Reinforced Nylon
2b	Rolling Seal Assembly	EPDM / Reinforced Nylon / Stainless Steel 316
2c	Float	Foamed Polypropylene
3	Base	
3a	O-Ring	NBR
3b	Bolts, Nuts & Washers	Steel/Stainless Steel 316
3c	Base Threaded / Flanged	Ductile Iron

